

CONVEY-ALL™ SANDSERIES

www.convey-all.com | (800) 418-9461



2245-SC

TRUCK LOAD SAND CONVEYOR

The Convey-All 2245-SC is perfect for moving product into a truck or trailer. The 2245-SC is self propelled, self-contained and fully hydraulic. Being self-contained and fully hydraulic means no dealing with belts, pulleys, chains or sprockets.

The 2245-SC features a 22" belt inside a 14" diameter tube and has a capacity of up to 12,000 lbs. of sand per minute.

STANDARD FEATURES:

- Tier 4 diesel engine
- 2 stage, hydraulic pump
- 25 US gallon (90 Litre) fuel tank
- 50 US gallon (190 Litre) hydraulic oil reservoir
- Heavy duty, 220 lb, 2 ply belt w/ Super Screw® lacing
- Torsion axle and light package w/ brakes
- Single fan, thermostatically controlled hydraulic oil cooler
- Sealed Dodge bearings

OPTIONS:

- Dust containment at the hopper
- Collapsible Hopper

MADE TO MOVE. MADE TO LAST. **MADE FOR SAND.**

Convey-All's Sand Series Conveyors are engineered specifically for handling frac sand. Unlike other conveyors that have reliability and service issues because they were designed for other applications, Convey-All's Sand Series Conveyors are built to withstand the high demands of the oil and gas industry. With features such as heavy-duty belts with Super Screw® lacing, sealed Dodge bearings and robust hydraulic drive systems, you can rely on Convey-All Sand Series Conveyors.



Available Stainless Steel



1616-RCSC

RAIL CAR SAND CONVEYOR


The Convey-All 1616-RC railcar unloader has exceptional reach and maneuverability. The 5" low profile hopper makes setting up to unload railcars simple and efficient. With its 16" belt inside a 10" diameter tube, it will move 6000-8000 lb of sand per minute.

STANDARD FEATURES:

- Hold-down wheel hopper transition
- Adjustable discharge hood
- Heavy duty, 220 lb, 2 ply belt w/ Super Screw® lacing
- Sealed Dodge bearings

OPTIONS:

- Gas, electric or hydraulic drive
- Stainless steel components
- Dust containment at the hopper
- Collapsible hopper

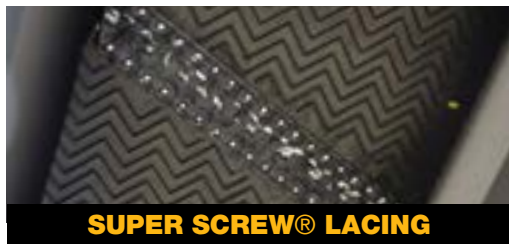

SUPER SCREW® LACING



SEALED DODGE BEARINGS



1690-SC

SILO FILL SAND CONVEYOR

The Convey-All 1690-SC offers more capacity with less power requirements. Its 16" belt inside a 10" diameter tube will move up to 7,000 lbs. of sand per minute. This unit features a self-propelled and self-contained drive system which operators can drive and raise into position, and with its self-tensioning system, eliminates slippage while increasing belt-to-roller surface contact.

The 1690-SC features replaceable flow panels at both the hopper and discharge ends. This extends the life of the conveyor with minimal downtime.

STANDARD FEATURES:

- Tier 4 diesel engine
- 2 stage hydraulic pump
- 15 US gallon (57 Litre) fuel tank
- 25 US gallon (95 Litre) hydraulic oil reservoir
- Heavy-duty, 220 lb, 2 ply belt w/ Super Screw® lacing
- All manual valves and operation
- Replaceable flow panels at hopper and discharge
- Dust containment at the hopper
- Dual fan, thermostatically controlled hydraulic oil cooler
- Sealed Dodge bearings

CONVEY-ALLTM SANDSERIES

www.convey-all.com | (800) 418-9461



Transport Mode



FSDO

FRAC SAND DRIVE OVER CONVEYOR

The Convey-All FSDO is the ultimate drive-over conveyor for frac sand. The extra wide, 12-foot drive-over deck fits perfectly under trucks and trailers. The 29-inch wide belt has a capacity of 22,000 lbs. of sand per minute. The ramps can be raised quickly into transport position to easily move from site to site.

STANDARD FEATURES:

- 50HP tier 4 diesel engine
- 35 GPM hydraulic pump
- 100 US Gallon (378 Litre) fuel tank
- 118 US Gallon (447 Litre) hydraulic oil reservoir
- 6000 series hydraulic motor
- All manual valves and operation
- Heavy duty, 330 lb, 3 ply belt w/ Super Screw® lacing
- Air ride suspension
- Sealed Dodge bearings
- Single fan, thermostatically controlled hydraulic oil cooler